


PROFESSIONAL ENCLOSED LIFT BAGS

- Versatile and easy-to-use, these enclosed-bottom, parachute-shaped lift bags with a single attachment point are essential in construction, heavy and light salvage and many offshore tasks.
- “Inverted water droplet” design facilitates maximum lift capacity with least possible weight, with stress distributed evenly over the fabric surface.
- Able to be pre-inflated when necessary
- Will not dump air if the bag breaks the surface of the water
- Pressure relief valves at the bottom of the bag avoid over pressurization of the lift bag
- Equipped with all the necessary hardware and ready for immediate use.




Model	Lift Capacity	Diameter	Overall Height	Packaged Cubic Dimension	Weight
PFE-1000	1100lb / 500kg	35in / 0.90m	56in / 1.44m	18in x 13in x 10in / .46m x .33m x .26m	17lb / 7.7kg
PFE-2000	2200lb / 1000kg	44in / 1.13m	63in / 1.62m	20in x 15in x 9.5in / .51m x .38m x .29m	30lb / 13.6kg
PFE-4000	4400lb / 2000kg	54in / 1.38m	94in / 2.41m	24in x 24in x 24in / .61m x .61m x .61m	50lb / 22.7kg
PFE-6000	6600lb / 3000kg	61in / 1.56m	108in / 2.77m	41in x 41in x 8in / 1.04m x 1.04m x .21m	80lb / 36.3kg
PFE-10000	10200lb / 4600kg	72in / 1.83m	116in / 2.95m	41in x 41in x 8in / 1.04m x 1.04m x .25m	105lb / 47kg
PFE-12000	12200lb / 5500kg	70in / 1.79m	130in / 3.33m	41in x 41in x 12in / 1.04m x 1.04m x .31m	125lb / 56.7kg
PFE-20000	22000lb / 10000kg	93in / 2.38m	146in / 4.10m	41in x 48in x 18in / 1.04m x 1.23m x .46m	190lb / 86.2kg
PFE-40000	44000lb / 20000kg	120in / 3.07m	201in / 6.16m	41in x 48in x 24in / 1.04m x 1.23m x .62m	325lb / 147.7kg
PFE-70000	77000lb / 35000kg	144in / 3.69m	258in / 6.77m	41in x 48in x 38in / 1.04m x 1.23m x .97m	410lb / 186.9kg
PFE-100000	107000lb / 48500kg	166in / 4.22m	316in / 8.03m	40in x 50in x 54in / 1.02m x 1.27m x 1.37m	525lb / 238kg

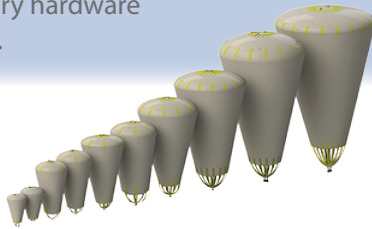

WATER LOAD TEST BAG

- Our Water Load Test Bags are constructed using the same technology used in our world class lift bags. These bags make it easier to load test structures due to their very low handling weight and make it possible to test in areas with insufficient access for conventional solid weights.
- Equipped with all the necessary hardware and ready for immediate use.

Model	Lift Capacity	Diameter	Overall Height	Packaged Cubic Dimension	Weight
PF-WLTB-20000	22000lb 10000kg	93in 2.38m	146in 4.10m	41in x 48in x 18in 1.04m x 1.23m x .46m	190lb 86.2kg
PF-WLTB-40000	44000lb 20000kg	120in 3.07m	201in 6.16m	41in x 48in x 24in 1.04m x 1.23m x .62m	325lb 147.7kg
PF-WLTB-70000	77000lb 35000kg	144in 3.69m	258in 6.77m	41in x 48in x 38in 1.04m x 1.23m x .97m	410lb 186.9
PF-WLTB-100000	110000lb 50000kg	166in 4.22m	316in 8.03m	40in x 50in x 54in 1.02m x 1.27m x 1.37m	525lb 238kg

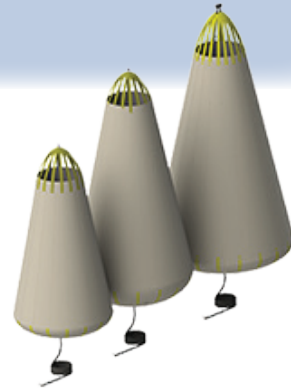

Sales and Rentals on all items!